

1587 3098 RS-4 CooK 32 22 STA TO STA FED. ROAD DIST. NO. . RLUNDIS FED. AID PROJECT

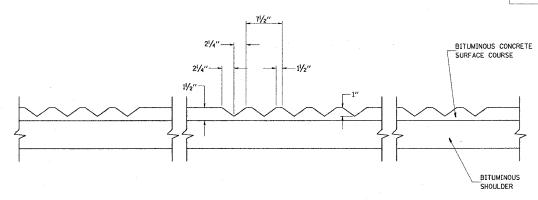

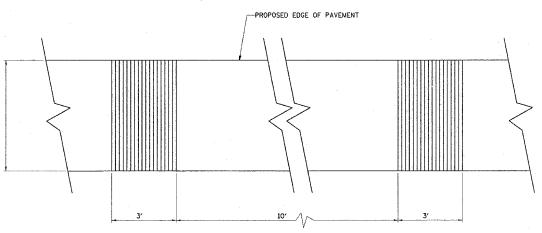

* SEE TYPICAL CROSS SECTIONS IN THE PLANS

TYPICAL SECTION

NOTES :

- 1. THE PLACEMENT OF THE SURFACE COURSE SHALL BE THE FULL WIDTH OF THE BITUMINOUS SHOULDER. THE CORRUGATED SHOULDER SHALL BE CONSTRUCTED SIMULTANEOUSLY WITH THE SURFACE COURSE.
- 2. THE METHOD OF COMPACTING AND GROOVING THE SHOULDER SHALL BE APPROVED BY THE ENGINEER.
- 3. THE CONTRACTOR SHALL PROTECT THE CORRUGATED SHOULDER WITH SUITABLE SAFETY DEVICES AS WORK PROGRESSES. TO PREVENT TRAFFIC USE UNTIL THE SHOULDER HAS COOLED SUFFICIENTLY TO PREVENT DEFORMATION OF THE GROOVES, AS DIRECTED BY THE ENGINEER.
- 4. A SEPARATE TANDEM ROLLER SHALL BE USED IN THE CONSTRUCTION OF THE CORRUGATED SHOULDER.
- 5. BASIS OF PAYMENT : THE CORRUGATED SHOULDER WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD FOR "BITUMINOUS SHOULDER" OF THE THICKNESS SPECIFIED, WHICH PRICE INCLUDES THE CONSTRUCTION OF THE GROOVED SURFACE COURSE AND ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY TO CONSTRUCT THE SHOULDER AS SHOWN.

CORRUGATED SHOULDER (COOK COUNTY)

CORRUGATED SHOULDER (COOK COUNTY)

SCALE: VERT. NOT TO SCALE HORIZ. DATE 8/23/2005

DRAWN BY C.A.D.

ILLINOIS DEPARTMENT OF TRANSPORTATION

CHECKED BY BD400-07 (BD-35)

diststd\0c35.dgm 8/23/8305 [:05:28 PM User-banks]

REVISION DATE: 03/22/91